



ASTROPHYSICS™
TOMORROW'S TECHNOLOGY FOR TODAY'S SECURITY



Al-TamKenCo.



*Sample image for reference only. Actual vehicle may vary based on order requirements.

XIS-Trailer

Diverse Application Screening Mobile Screening Solution



TRANSPORTATION

Airport entrances and perimeters,
air cargo, and checkpoint technology.



PORTS & BORDERS

Border control, sea ports, and
other large cargo sectors.



CRITICAL INFRASTRUCTURE

Access control for prisons, courthouses,
mailrooms, hotel entrances and
military bases.

The XIS-Trailer has tunnel dimensions 101.6 cm x 101.6 cm (40.0" x 40.0") and is the ideal solution for flexible screening. The XIS-Trailer has durable aluminum walls and roofing on a custom steel frame construction. The XIS-Trailer is suitable for both indoor and outdoor applications.

Significantly, the XIS-Trailer is the first in its class in standard features. The XIS-Trailer includes a high-powered 180 kV generator, Air Conditioning, Exterior Lighting, Uninterrupted Power Supply and Automatic Image Archiving.

The XIS-Trailer offers a mobile solution to security gaps and includes extensive standard features, and an enlarged tunnel for more diverse screening.

All Astrophysics X-ray Inspection Systems are equipped with Real-Time Diagnostics, a unique Astrophysics feature which allows users to monitor system health. This software was specifically engineered to save you valuable time and money. If requested, Astrophysics would also be able to connect to your system and troubleshoot any issues remotely.

An exclusive Astrophysics option is our 6 Color Imaging, which enables operators to view screened objects in 6 colors, each color correlating to a specific range of Atomic Z-Numbers. 6 Color Imaging enables operators to achieve optimal material identification which improves throughputs.

Astrophysics is committed to providing quality products and services nationwide. We listen to our customers and offer customizations and order flexibility based on their needs.

Backed by a team of engineers from our City of Industry, California center of excellence headquarters, Astrophysics designs cutting-edge X-ray screening technology for detecting weapons and contraband for transportation, ports, borders, critical infrastructure and other industries that present security risks.

Astrophysics is headquartered in the United States and maintains a global presence with service delivery worldwide. Astrophysics is committed to global safety and is proud to present this new age of screening security—driving the industry into the technology of tomorrow.





GENERAL SPECIFICATIONS

- Tunnel Size: 101.6 cm x 101.6 cm
(W x H) 40.0" x 40.0"
- Dimensions²: 623.8 cm x 228.6 cm x 352.2 cm
(L x W x H) 246.0" x 90.0" x 138.6"
- Weight²: 3900kg (8600lbs)
- Conveyor Speed: 23 cm/s (45 ft/min) Forward or Reverse
- Conveyor Capacity: 200 kg (440 lbs) Evenly Distributed Load
- Model: Custom Trailer
Climate Controlled Operator Cabin
Input: Powered Conveyor
Output: Gravity Driven Roller
Hydraulic Stabilizers

TECHNICAL

- Sensitivity: 40 AWG Typical, 38 AWG Standard
- Spatial Resolution: 1.0 mm Horizontal, 1.3 mm Vertical
- Steel Penetration: 39 mm Typical, 37 mm Standard
- Contrast Sensitivity: 24 Visible Levels, 4096 Gray Level
- Film Safety: Guaranteed up to ISO 1600 (33DIN)

X-RAY GENERATOR

- Voltage: Dual 180kV, Operating at 165kV
- Tube Current: Dual 1.0 mA
- Cooling: Sealed Di-Electric Oil Bath with Forced Air
- Duty Cycle: 100%, No Warm-Up Procedure Required
- Beam Direction - View 1: Diagonally Downward
- Beam Direction - View 2: Horizontally Sideward
- Detector: 4608 Channels in an L-Shaped Array

COMPUTER

- Processor: Intel® Core i5
- Memory: 4 GB RAM
- Storage: 500 GB HDD, 120 GB SSD
- Video Card: 1 GB Video Card
- Platform: Windows® OS
- Backup: Uninterruptible Power Supply
(Computer Operation- 20 min)

VIDEO

- Display Type: Dual 24" LCD Color Monitor
- Display Resolution: 1600 x 1200; 24 bit/pixel Color

ENVIRONMENTAL


- Operating Temperature: 0°C - 40°C \ 32°F - 104°F
- Storage Temperature: -20°C - 60°C \ -4°F - 140°F
- Humidity: Up to 95% Non-Condensing

ELECTRICAL

- Power Requirements (XIS): 110VAC ± 10%, 50/60Hz, 20 Amp Max
220VAC ± 10%, 50/60Hz, 15 Amp Max
*X-Ray Machine

HEALTH AND SAFETY

- Compliant with USFDA, Center for Devices and Radiation Health Standards for Cabinet X-Ray Systems (21-CFR 1020.40)
- Typical radiation leakage is less than 0.1 mR/hr (Leakage less than 0.5 mR/hr)

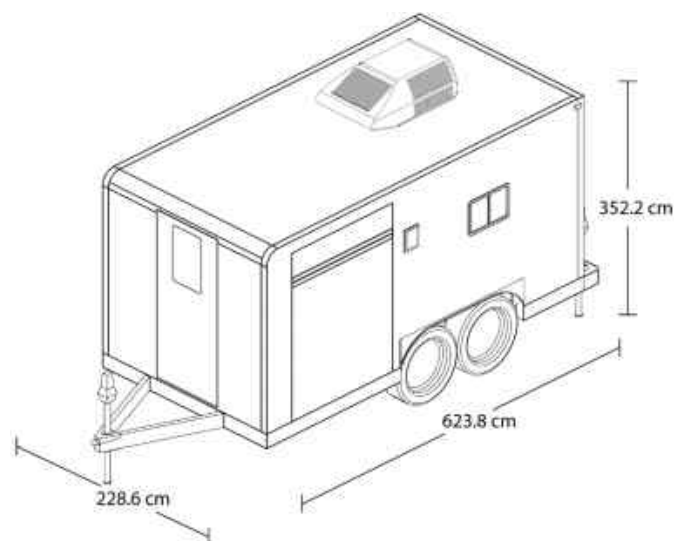

STANDARD FEATURES

- 6 Color Imaging
- 9 Quadrant Zoom
- Atomic Z-Number Measurement
- Auto Image Archiving (150,000)
- Baggage Counter
- Color and Black/ White Imaging
- Continuous Scanning
- Continuous Zoom up to 64x
- Vertical Zoom Panning
- Geometric Image Distortion Correction
- High Penetration Function
- Heavy Duty Roller Casters
- Image Annotation
- Image Review
- JPEG Conversion
- Material Discrimination
- Multi-Tier Accessibility
- Network Ready
- Organic/ Inorganic Imaging
- Operator Training Program (OTP)
- Picture Perfect
- Print Image Capable
- Pseudo Color
- Real-Time Image Manipulation
- Real-Time Self Diagnostics
- Reverse Monochrome
- Save Image (RGB)

OPTIONAL FEATURES³

- Custom Paint
- Density Alert
- Entry / Exit Roller Tables
- Image Analysis Program (IAP)
- Image Analysis Program - LITE (IAP - LITE)
- Intercom System
- Local Language Support
- Polar Kit
- Radiation Meter
- Screener Assist Software
- Test Case
- Threat Image Projection (TIP) Software
- Tropical Kit
- Wireless Barcode Scanning



¹ As tested on Astrophysics Inc. Test Piece.

² Weight and dimensions of the system may vary depending on customization.

³ Optional features may affect lead time price, and weight of XIS-Trailer. Please contact your Astrophysics Sales Representative for more information.

⁴ Maximum Values on ASTM F792 Test Piece.

Due to continued product research and development, Astrophysics Inc. reserves the right to amend all technical specifications without prior notice.